

Express Mail Label No.: EL443489922US

PATENT

Case Docket No.: 99 P 7722 US

Date: July 29, 1999

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231
Box PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): JAMMY et al

For: METHOD FOR FORMING CRYSTALLINE SILICON NITRIDE

This application includes:

20 pages: specification and claims
5 sheets of drawings, formal/ X informal
 photographs

Also enclosed is:

X Declaration and Power of Attorney
 Information Disclosure Statement pursuant to 37 CFR 1.56.

The filing fee has been calculated as shown below:

FOR:	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA RATE	OTHER THAN A SMALL ENTITY FEE
BASIC FEE	XXXXXXXX	XXXXXXXXXX	XXXXX \$760.
TOTAL CLAIMS	20- 20 =	0	x 18.= \$ 0.
INDEP CLAIMS	3- 3 =	0	x 78.= \$ 0.
* MULTIPLE DEPENDENT CLAIM PRESENTED			+260.= \$ 0.
			TOTAL \$ 760.

- X Please charge my Deposit Account No. 19-2179 in the amount of \$ 760.00. A duplicate copy of this sheet is enclosed.
- X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 19-2179. A duplicate copy of this sheet is enclosed.
- X Any additional filing fees required under 37 CFR 1.16.
- X Any patent application processing fees under 37 CFR 1.17.
- X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 19-2179. A duplicate copy of this sheet is enclosed.
- X Any patent application processing fees under 37 CFR 1.17.
- X Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Donald B. Paschburg
Donald B. Paschburg
Registration No. 33,753

Siemens Corporation
Intellectual Property Department
186 Wood Avenue South
Iselin, N.J. 08830

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

NAME OF INVENTORS:

Citizen:

Philip L. FLAITSZ

Citizen.

Philip E. BATSON

Citizen:

Hua SHEN

Citizen:

China

Yun Yu WANG

Citizen:

China

TITLE OF INVENTION:

METHOD FOR FORMING CRYSTALLINE NITRADE

TO WHOM IT MAY CONCERN, THE FOLLOWING IS
A SPECIFICATION OF THE AFORESAID INVENTION

BACKGROUND

This disclosure relates to semiconductor fabrication and more particularly, to a method for forming crystalline silicon nitride dielectric layers for semiconductor devices.

2. Description of the Related Art

Silicon nitride is used extensively in microelectronic technology for its superior dielectric properties. Typically, silicon nitride includes superior dielectric constant (e.g., $\epsilon = 7.5$ for silicon nitride) as compared to silicon dioxide (e.g., $\epsilon = 3.9$). The need for higher capacitance with shrinking dimensions in semiconductor devices such as dynamic random access memories (DRAMs) has been met by reducing the thickness of dielectric layers. Much of the silicon nitride employed for microelectronic applications is deposited by Chemical Vapor Deposition (CVD) techniques and is amorphous in structure. Although thick amorphous silicon nitride (Si_3N_4) films have adequately low leakage currents, for thin ($< 50 \text{ \AA}$) dielectric films, higher leakage currents impede, if not preclude, successful device implementation.

To overcome the limitations posed by excessive

leakage currents observed in thin CVD nitride dielectric layers, a thermally grown Si_3N_4 component is added to the CVD nitride layer. Thermally grown Si_3N_4 is denser than CVD silicon nitride and exhibits superior electrical properties for the same thickness. However, thermal growth of silicon nitride is a self limiting process (at about 950 °C approximate thickness of nitride layer is 18-23 Å which is limited by the thermal growth process). To meet the total required thickness, a CVD nitride layer may be added to the initial thermal nitride.

For DRAM chips employing deep trench capacitors, a node dielectric is deposited in a deep trench. The node dielectric separates the storage node in the deep trench from a buried plate outside the trench to form a capacitor. It is desirable for the node dielectric to be as thin as possible to provide a high capacitance with minimal or low leakage. Node dielectrics have evolved from using an oxide only (O) dielectric layer to a mixed oxide-nitride (ONO) and currently to nitride-oxide (NO) dielectric layers to take advantage of the higher ϵ of Si_3N_4 . Similarly, for gate dielectrics, in addition to a reduction in thickness, incorporation of some nitride into the oxide film is being explored to boost the physical thickness (and dielectric constant) while keeping the equivalent oxide thickness small enough to meet the needs of smaller and faster devices.

A desirable option for improving the properties

of ultra-thin dielectric layers would be to employ crystalline Si_3N_4 films for such applications. Unlike CVD nitride films, in which the large leakage currents have been attributed to the presence of a large number of defects and pinholes, crystalline nitride films by nature could be denser and relatively defect free. However, crystalline Si_3N_4 films are difficult to grow and unstable due to lattice mismatch with silicon and the consequent excessive strain at the growth interface. An added complication for the case of a node dielectric is the presence of a thin non-stoichiometric native oxide on the exposed silicon surface of a substrate which inhibits the reaction between nitridizing species and the silicon substrate. This native oxide may be partially responsible for the electrical leakage in thermally grown nitride films.

Therefore, a need exists for a method to preclean and remove a native oxide before thermal nitridation of exposed silicon is performed. A further need exists for a method for forming a crystalline silicon nitride for semiconductor devices.

SUMMARY OF THE INVENTION

In accordance with the present invention, a method for forming a crystalline silicon nitride layer, includes the steps of providing a crystalline silicon substrate with an exposed silicon surface, precleaning

the exposed surface by annealing in a hydrogen ambient and further annealing or exposing the exposed surface to nitrogen (e.g. in an ammonia ambient) to form a crystalline silicon nitride layer.

5 A method for forming a node dielectric layer in deep trenches, includes the steps of providing a crystalline silicon substrate with trenches formed therein, the trenches including surfaces with exposed silicon, precleaning the exposed silicon surfaces by
10 employing a hydrogen prebake, exposing the exposed surfaces to ammonia to form a crystalline silicon nitride layer, depositing an amorphous silicon nitride layer over the crystalline silicon nitride layer, and oxidizing the amorphous silicon nitride layer to form a node (NO)
15 dielectric layer.

 In alternate methods, the step of precleaning may include the step of employing a wet cleaning process to remove native oxide from the exposed surface(s). The cleaning process may include HF cleaning. The step of
20 precleaning may include the step of prebaking the exposed surface(s), in situ, in the presence of hydrogen gas, hydrogen plasma or similar reducing atmospheres at a temperature between about 400 °C and about 1300 ° at a pressure between about 10^{-9} Torr and about 600 Torr. The
25 step of precleaning may include the step of prebaking the exposed surface(s) in the presence of hydrogen gas introduced at a flow rate of between about 100 sccm and about 20 SLM for between about 2 seconds and about 3600

seconds. Flow rates and time durations can vary over a wide range of acceptable values depending on the conditions and the tool set employed. The step of annealing/exposing the exposed surface(s) to nitrogen to form a crystalline silicon nitride layer may include the step of introducing ammonia at a temperature of between about 400 °C and about 1300 °C. The step of exposing the exposed surface(s) to nitrogen to form a crystalline silicon nitride layer may include the step of maintaining ammonia at a pressure of between about 10^{-6} Torr and about one atmosphere or greater. A semiconductor device may be fabricated in accordance with the methods described herein.

A trench capacitor, in accordance with the present invention, includes a crystalline silicon substrate including deep trenches having surfaces substantially free of native oxide. A dielectric stack, including a crystalline silicon nitride layer, is formed on the surfaces of the trenches. The dielectric stack forms a node dielectric between electrodes of the trench capacitor.

In alternate embodiments, the crystalline silicon nitride layer may include a thickness of between about 3 Å and about 40 Å. The dielectric stack may include an oxidized amorphous nitride layer.

These and other objects, features and advantages of the present invention will become apparent from the following detailed description of illustrative

embodiments thereof, which is to be read in connection with the accompanying drawings.

5 **BRIEF DESCRIPTION OF DRAWINGS**

 This disclosure will present in detail the following description of preferred embodiments with reference to the following figures wherein:

 FIG. 1 is a flow diagram showing a method for
10 forming a crystalline silicon nitride layer in accordance with the present invention;

 FIG. 2 is a cross-sectional view of a trench
 formed in a silicon substrate for forming a silicon
 nitride crystalline layer in accordance with the present
15 invention;

 FIG. 3 is a magnified cross-sectional view of
 area 8 of FIG. 2 showing a crystalline silicon nitride
 layer formed in accordance with the present invention;

 FIG. 4 is a cross-sectional view of the area 8
20 of FIG. 3 showing an additional silicon nitride layer
 formed in accordance with the present invention; and

 FIG. 5 is a cross-sectional view of the area 8
 of FIG. 4 showing an oxidized silicon nitride layer
 formed in accordance with the present invention.

25

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

 The present invention relates to semiconductor
 fabrication and more particularly, to a method for

forming crystalline silicon nitride dielectric layers for semiconductor devices. Silicon nitride, and preferably stoichiometric Si_3N_4 , is an important dielectric material for many microelectronic applications needing a high dielectric constant (ϵ) with low leakage currents. Much of the silicon nitride used for such applications is amorphous and is typically a combination of both thermally grown (in N_2 or NH_3) and/or deposited (by LPCVD techniques) materials. Although desirable for their enhanced properties, crystalline silicon nitride films are difficult to grow due to lattice mismatch and off-stoichiometric growth kinetics. The present invention includes a method for forming a crystalline silicon nitride layer. In a preferred embodiment the present invention is illustratively described for the formation of a node dielectric in deep trenches for deep trench capacitors. Other applications are contemplated as well. A preclean process is desirable prior to the formation of the crystalline silicon nitride layer.

Referring now in specific detail to the drawings in which like reference numerals identify similar or identical elements throughout the several views, and initially to FIGS. 1 and 2, a flow diagram for a method in accordance with the invention (FIG. 1) and a cross-sectional view of a semiconductor chip 10 (FIG. 2) are shown. Semiconductor chip 10 may include a memory device such as, a dynamic random access memory (DRAM), a synchronous DRAM (SDRAM), static RAM or other memory

device. It is to be understood that the present invention is not limited to semiconductor memories. The invention may be practiced for semiconductor chips which may include processors, embedded DRAM or other embedded memory devices, application specific integrated circuit chips (ASIC) or any other devices which employ dielectric films.

Semiconductor chip 10 of FIG. 2, illustratively shows a semiconductor memory having deep trench capacitor technology. In block 1, a semiconductor chip 10 is provided. Semiconductor chip 10 includes a substrate 12 which may be a monocrystalline silicon substrate, however, other silicon based/modified materials may be employed, for example, silicon on insulator, epitaxially grown silicon, etc. A pad stack 11 is formed on substrate 12. Pad stack 11 preferably includes a thermal oxide layer 13 and a pad nitride layer 15. Deep trenches 14 have been formed in substrate 12 by methods known to those skilled in the art. A buried plate 16 is also formed by conventional methods. These methods may include depositing arsenic silicate glass (ASG) in the trench as a dopant source and diffusing dopants into substrate 12. Alternate techniques may include employing ion bombardment or gas phase doping to form buried plate 16.

Prior to further processing, it is preferable to preclean exposed surfaces of substrate 12, i.e., trench sidewalls, to remove native oxides which may form

on the surface of substrate 12. In block 2, a standard cleaning process is performed to remove the native oxide on the trench sidewalls and exposed surfaces. The cleaning process may include a wet cleaning process, such as, a HF clean or other cleaning processes known in the art, such as, a RCA/B clean. Combinations of cleaning processes may also be employed. The wafers or chips are then transferred to the reaction chamber for further processing. The reaction chamber in which processing occurs is then evacuated if the transfer is not done, in situ, under vacuum..

In block 3, a hydrogen (H_2) preclean is performed on the exposed silicon surface of the trench sidewalls after the evacuation of the reaction chamber. This step further removes the native oxide from the silicon surface of substrate 12 at sidewalls of trench 14. The efficacy of the clean process depends on the temperature, time, gas flow and pressure. In a preferred method, the gas flow may include a flow rate of about 100 sccm and about 10 SLM for between about 2 seconds and about 3600 seconds. Flow rates and time durations can vary over a wide range of acceptable values depending on the conditions and the tool set employed. The step of precleaning may include the step of prebaking exposed silicon surface(s), in situ, in the presence of hydrogen gas, hydrogen plasma or similar reducing atmospheres at a temperature between about 400 °C and about 1300 ° and at a pressure between about 10^{-9} Torr and about 600 Torr.

FIG. 2 indicates an area of interest 8 which is magnified in FIGS. 3, 4 and 5 to show the process step of the method of the present invention.

Referring to FIG. 3, with continued reference to FIG. 1, after evacuating the reaction chamber of any H₂ (typical but not necessary), the silicon surface of substrate 12 is exposed to nitrogen containing compounds, preferably ammonia (NH₃) or N₂ gas, in block 4. For convenience, the process will be illustratively described using ammonia. The nitrogen may be introduced with other materials or compounds, for example, N₂ gas, atomic nitrogen formed by plasma techniques or nitrogen containing organic or inorganic precursors. Ammonia is preferably introduced into the reaction chamber at a temperature of between about 400 °C and about 1300 °C, preferably between about 900 °C and about 1100 °C. The pressure maintained in the chamber during the introduction of the ammonia is between about 10⁻⁶ Torr and about one atmosphere or greater, preferably between about 1 Torr and about 600 Torr. The thickness of a nitride layer 18 formed during this step is largely dependent on the temperature and to a lesser extent on the pressure. In a preferred embodiment, a thickness of nitride layer 18 is between about 3 Å to about 40 Å. Nitride layer 18 forms a crystalline silicon nitride layer.

The crystalline characteristics of this nitride layer 18 have been confirmed by tests and analysis. For example, a substantially continuous crystalline silicon

nitride layer was observed along the trench sidewalls of a semiconductor device. Nitride layer 18 exhibited characteristics indicative of a crystalline layer and was uniformly oriented parallel to the silicon in the sidewalls of the trench. Measurement of the lattice planes of nitride layer 18 resulted in a measured spacing of approximately 4 Å, which is a close match to the theoretical spacing of 3.88 Å for the (110) planes of hexagonal Si₃N₄.

Nitride layer 18 may include a thickness of between 2-6 atomic layers. In addition, analysis on a Scanning Transmission Electron Microscope (STEM) with a 2-3 Å lateral resolution and Electron Energy Loss Spectroscopy (EELS) with an energy resolution of 0.35 eV confirmed that the layer was crystalline silicon nitride and oxide at the silicon to silicon nitride interface was absent. The crystalline silicon nitride layer was not observed when the sample was not subjected to in situ H₂ pre-bake and NH₃ nitridation in accordance with the present invention.

The H₂ pre-bake, in block 3, results in a thicker nitride layer 18. Depending on the growth conditions (i.e, crystal directions of the surface on which the film is to be grown), the pressure of the H₂ pre-bake (block 3) and the time between the cleaning (block 2) and H₂ pre-bake (block 3) three distinct types of nitride films may result. The three distinct types of nitride films are illustratively described in terms of

specifics. These specifics are not to be construed as limiting as other parameters may be employed in accordance with the invention to achieve similar results. The three distinct types of nitride films that may result include:

a) a continuous crystalline layer which is formed if the pressure is about 5 Torr and the amount of time between the cleaning process and the H₂ pre-bake is between less than about 30 seconds and about 1 hour;

b) a floating (partial) crystalline layer is formed if the pressure is below about 5 Torr and the amount of time between the cleaning process and the H₂ pre-bake is between more than about 1 hour; and

c) an amorphous layer is formed outside the parameters of a) and b).

Advantageously, this provides the ability to modulate silicon nitride layer 18 by varying the process conditions. Other process parameters and tool settings may be used as well.

Referring to FIG. 4 with continued reference to FIG. 1, an additional silicon nitride layer 20 may be deposited by a chemical vapor deposition (CVD) process or a physical vapor deposition process in block 5, to obtain a desired thickness of a total dielectric layer. The total dielectric layer thickness is comprised of nitride layer 18 and nitride layer 20.

Referring to FIG. 5 with continued reference to FIG. 1, an additional step may be performed to make the

total dielectric layer compatible with later processes. Nitride layers 18 and 20 may be exposed to an oxidizing ambient at suitable temperatures to form an oxidized portion of nitride layer 20 thereby forming an N-O stack.

5 Processing then continues as is known in the art. A storage node is formed in trench by filling the trench with polysilicon. The storage node (not shown) and buried plate 16 act as capacitor electrodes for which the N-O stack is the capacitor or node dielectric.

10 Although described in terms of a deep trench capacitor, the present invention may be applied to other semiconductor structures and devices. For example, the crystalline silicon nitride layer may be employed instead of a gate oxide for vertical transistors. Other
15 applications are contemplated as well. Local nitride crystallization may also be formed by employing the above methods in accordance with the present invention. For example, localized nitride crystals may be formed on polycrystalline silicon surfaces to provide a dielectric
20 layer thereon. This embodiment may be employed for forming devices in flash memories, for example, or other devices employing polysilicon.

Having described preferred embodiments for a method for forming crystalline silicon nitride (which are
25 intended to be illustrative and not limiting), it is noted that modifications and variations can be made by persons skilled in the art in light of the above teachings. It is therefore to be understood that changes

may be made in the particular embodiments of the invention disclosed which are within the scope and spirit of the invention as outlined by the appended claims.

Having thus described the invention with the details and
5 particularity required by the patent laws, what is claimed and desired protected by Letters Patent is set forth in the appended claims.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223

WHAT IS CLAIMED IS:

1. A method for forming a crystalline silicon nitride layer, comprising the steps of:

providing a crystalline silicon substrate with an
5 exposed surface;

precleaning the exposed surface by employing a
hydrogen prebake; and

exposing the exposed surface to nitrogen to form a
crystalline silicon nitride layer.

10

2. The method as recited in claim 1, wherein the
step of precleaning includes the step of employing a
hydrogen fluoride wet clean process to remove native
oxide from the exposed surface.

15

3. The method as recited in claim 2, wherein the
step of precleaning the exposed surface by employing a
hydrogen prebake is delayed from the step of employing a
hydrogen fluoride wet clean process to remove native
20 oxide from the exposed surface by an interval of between
about 30 seconds and about 3600 seconds.

4. The method as recited in claim 1, wherein the
step of precleaning includes the step of prebaking the
25 exposed surface in the presence of hydrogen gas at a
temperature between about 400 °C and about 1300 °C.

5. The method as recited in claim 1, wherein the step of precleaning includes the step of prebaking the exposed surface in the presence of hydrogen gas at a pressure between about 10^{-9} Torr and about 600 Torr.

5

6. The method as recited in claim 1, wherein the nitrogen includes at least one of nitrogen gas, ammonia, atomic nitrogen plasma, an organic nitrogen precursor and an inorganic nitrogen precursor.

10

7. The method as recited in claim 1, wherein the step of exposing the exposed surface to nitrogen to form a crystalline silicon nitride layer includes the step of introducing ammonia at a temperature of between about 400 °C and about 1300 °C.

15

8. The method as recited in claim 1, wherein the step of exposing the exposed surface to nitrogen to form a crystalline silicon nitride layer includes the step of maintaining ammonia at a pressure of between about 10^{-6} Torr and about one atmosphere.

20

9. A semiconductor device fabricated in accordance with the method as recited in claim 1.

25

10. A method for forming a node dielectric layer in

deep trenches, comprising the steps of:

providing a crystalline silicon substrate with trenches formed therein, the trenches including exposed silicon surfaces;

5 precleaning the exposed surfaces by employing a hydrogen prebake;

 exposing the exposed surfaces to ammonia to form a crystalline silicon nitride layer;

 depositing an amorphous silicon nitride layer over
10 the crystalline silicon nitride layer; and

 oxidizing the amorphous silicon nitride layer to form a node dielectric layer.

 11. The method as recited in claim 10, further comprising the step of employing a hydrogen fluoride
15 clean process to remove native oxide from the exposed surfaces.

 12. The method as recited in claim 11, wherein the step of precleaning the exposed surfaces by employing a
20 hydrogen prebake is delayed from the step of employing a hydrogen fluoride clean process to remove native oxide from the exposed surfaces by an interval of between about 30 seconds and about 3600 seconds.

 13. The method as recited in claim 10, wherein the step of precleaning includes the step of prebaking the
25

exposed surfaces in the presence of hydrogen gas at a temperature between about 400 °C and about 1300 °C.

14. The method as recited in claim 10, wherein the
5 step of precleaning includes the step of prebaking the exposed surfaces in the presence of hydrogen gas at a pressure between about 10^{-9} Torr and about 600 Torr.

15. The method as recited in claim 10, wherein the
10 step of exposing the exposed surfaces to ammonia to form a crystalline silicon nitride layer includes the step of introducing the ammonia at a temperature of between 400 °C and about 1300 °C.

16. The method as recited in claim 10, wherein the
15 step of exposing the exposed surfaces to ammonia to form a crystalline silicon nitride layer includes the step of maintaining the ammonia at a pressure of between about 10^{-6} Torr and about one atmosphere.

20

17. A semiconductor device fabricated in accordance with the method as recited in claim 10.

18. A trench capacitor comprising:
25 a crystalline silicon substrate including deep trenches having surfaces in the substrate substantially

free of native oxide; and

a dielectric stack, including a crystalline silicon nitride layer, formed on the surfaces of the trenches, the dielectric stack for forming a node
5 dielectric between electrodes of the trench capacitor.

19. The trench capacitor as recited in claim 18, wherein the crystalline silicon nitride layer includes a thickness of between about 3 Å and about 40 Å.

10

20. The trench capacitor as recited in claim 18, wherein the dielectric stack includes an oxidized amorphous nitride layer.

15

ABSTRACT OF THE DISCLOSURE

In accordance with the present invention, a method for forming a crystalline silicon nitride layer, includes the steps of providing a crystalline silicon substrate with an exposed surface, precleaning the exposed surface by employing a hydrogen prebake and exposing the exposed surface to nitrogen to form a crystalline silicon nitride layer. Also, a trench capacitor, in accordance with the present invention, includes a crystalline silicon substrate including deep trenches having surface substantially free of native oxide. A dielectric stack, including a crystalline silicon nitride layer, is formed on the sidewalls of the trenches. The dielectric stack forms a node dielectric between electrodes of the trench capacitor.

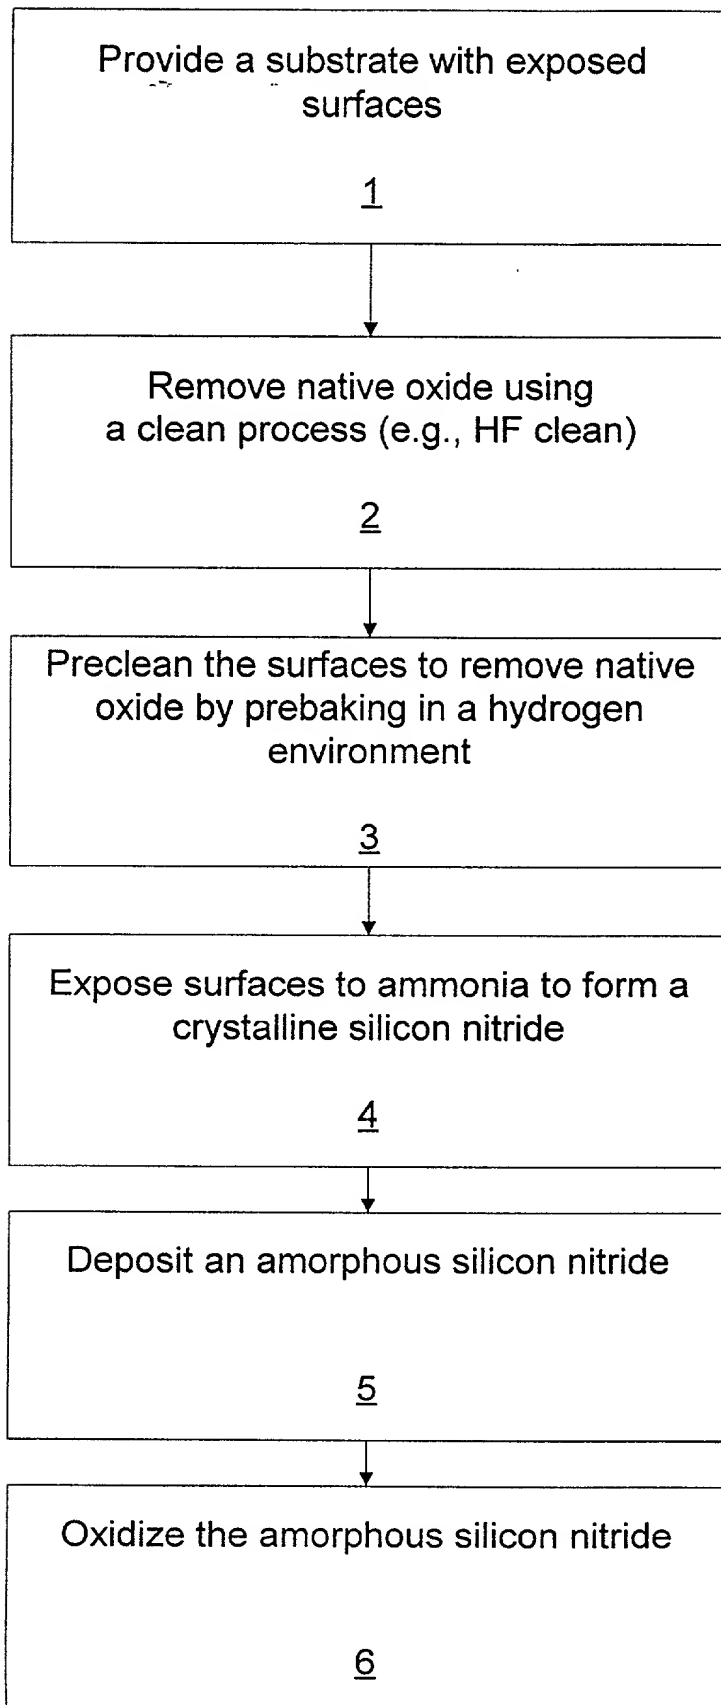


FIG. 1

10 ~ ~ ~

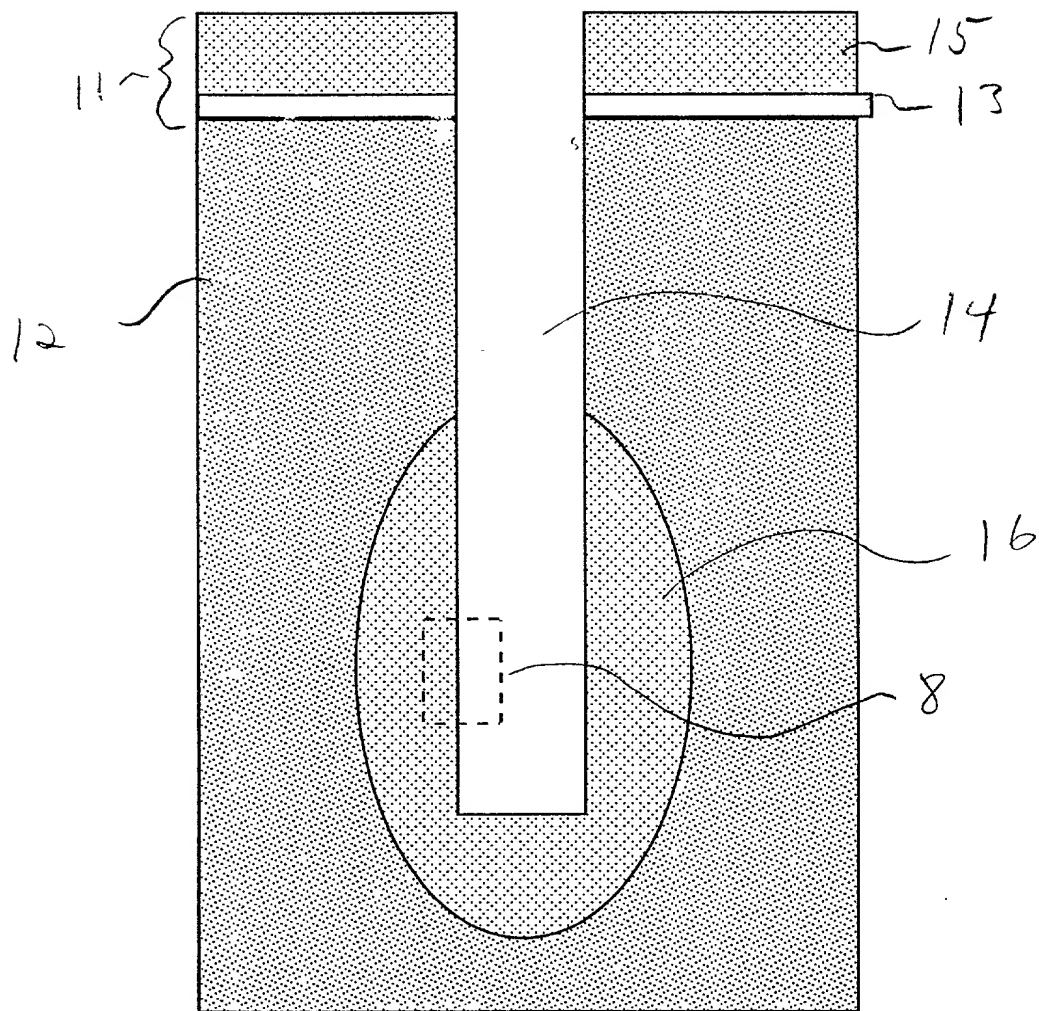


FIG. 2

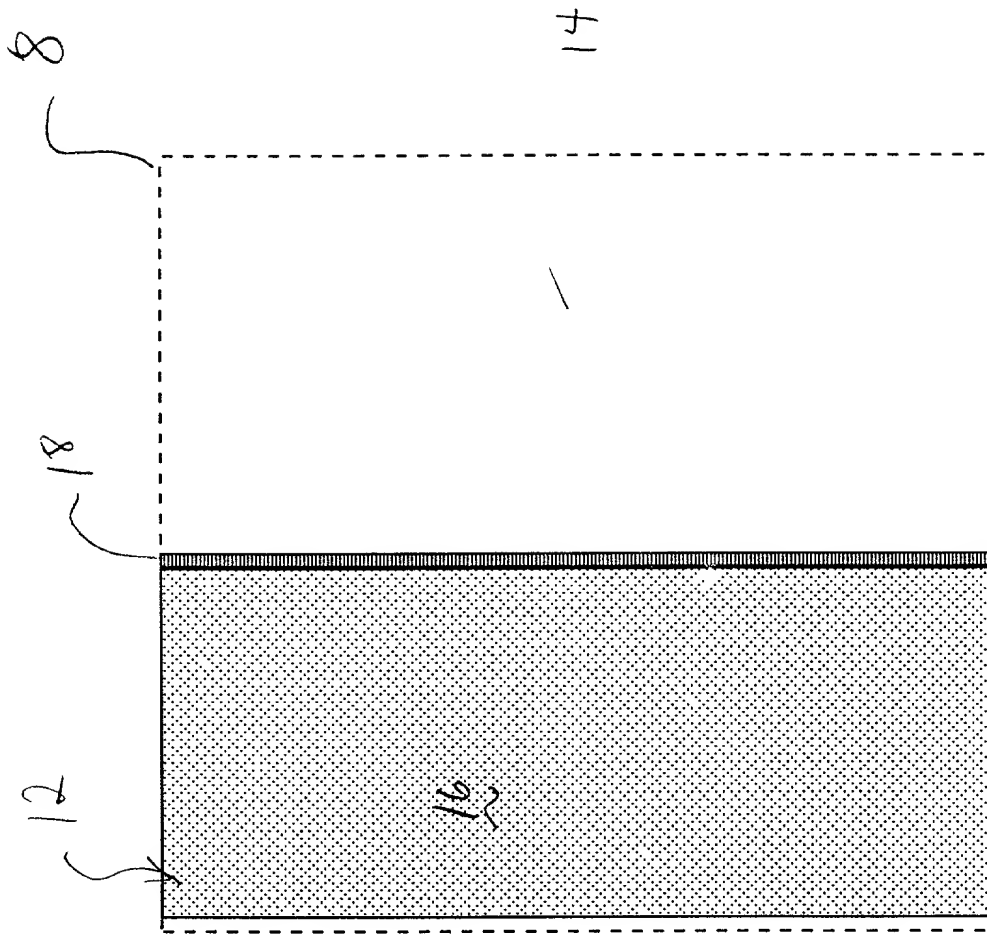


FIG 3


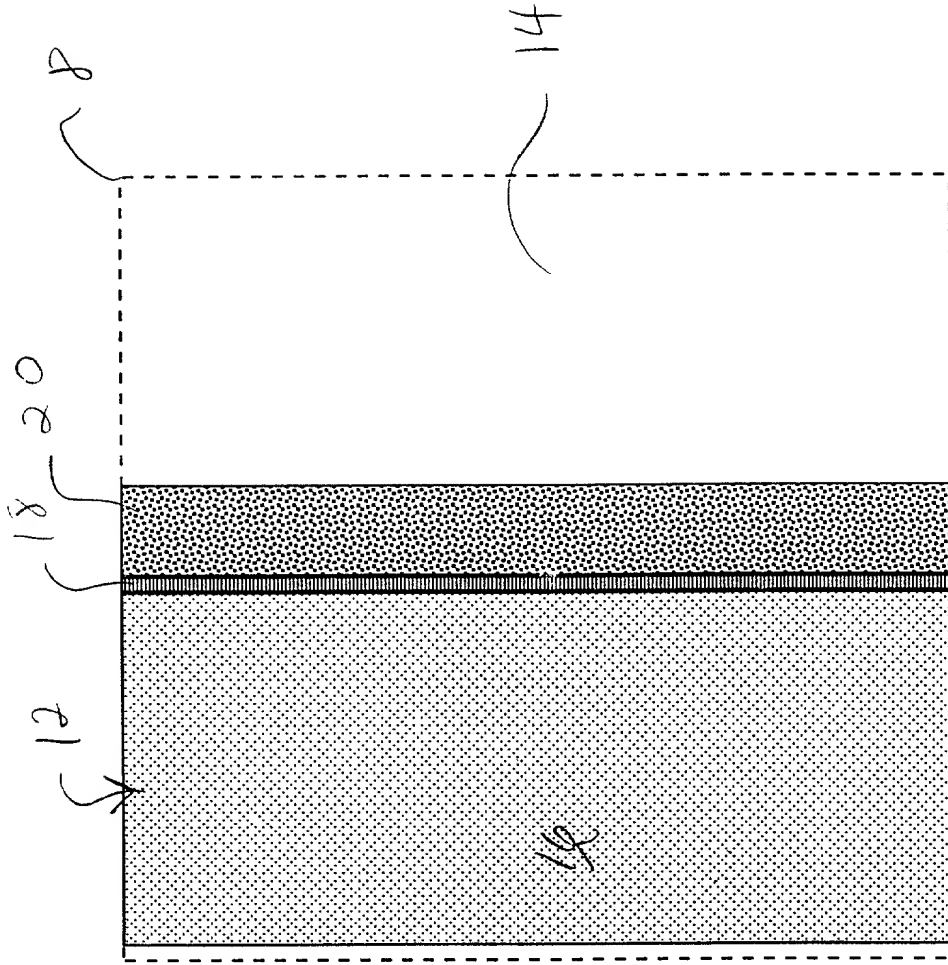


FIG. 4

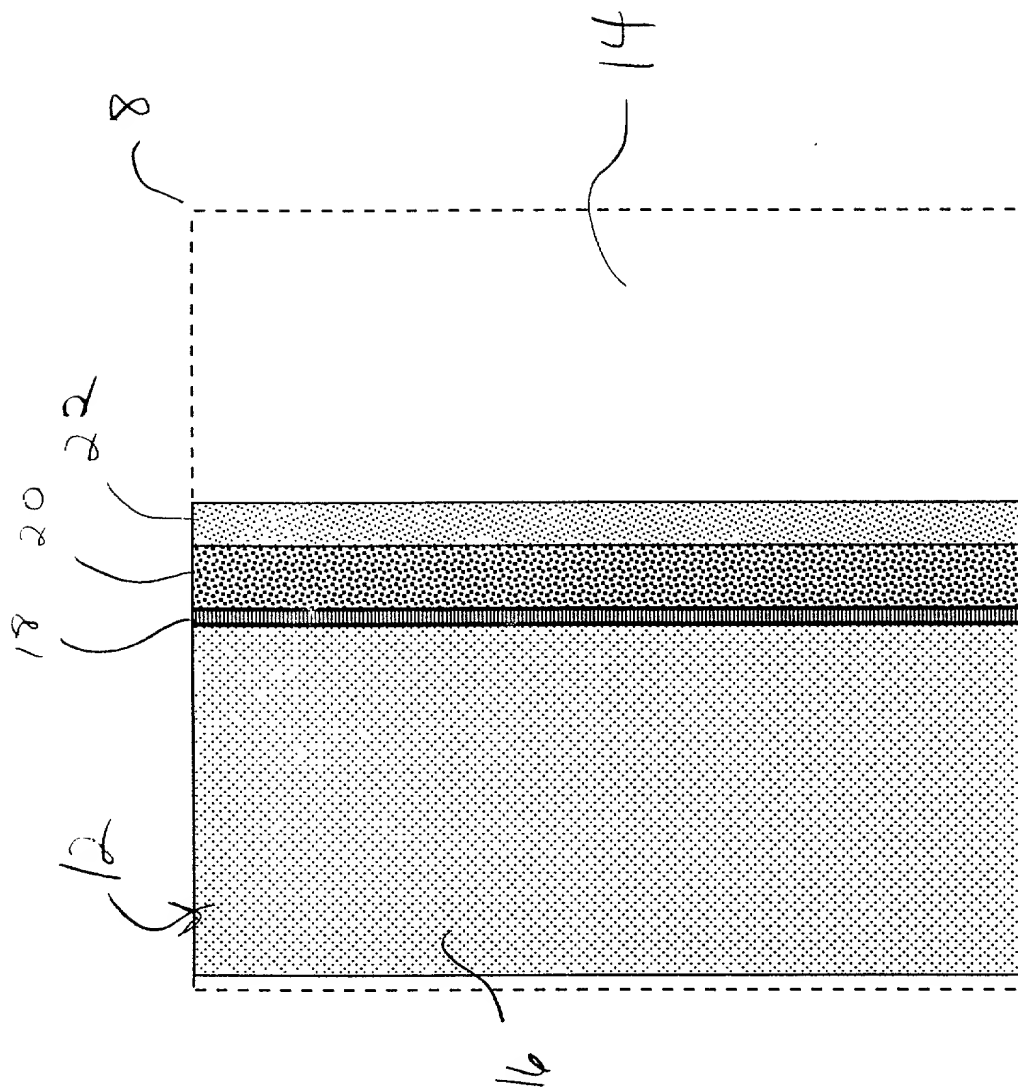

5644

DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe we are the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR FORMING CRYSTALLINE SILICON NITRIDE

the specification of which
X is attached hereto, and
 _____ was filed on _____ as Application Serial No. _____
 and was amended on _____ (if applicable)

Listing of named inventor(s): Rajarao JAMMY; Philip L. FLAITS; Philip E. BATSON; Hua SHEN; Yun Yu WANG

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Codes, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)			Priority claimed	
(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No

I hereby claim the benefits under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing date)	(Status)
(Application Serial No.)	(Filing date)	(patented, pending, abandoned)
(Application Serial No.)	(Filing date)	(Status)
(Application Serial No.)	(Filing date)	(patented, pending, abandoned)

Power of Attorney: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Adel A. Ahmed, Reg. No. 29,606; Stanton C. Braden, Reg. No. 32,556; Robert T. Canavan, Reg. No. 37,592; Dexter K. Chin, Reg. No. 38,842; Joseph S. Codispoti, Reg. No. 31,819; Aaron C. Deditch, Reg. No. 33,865; Lawrence C. Edelman, Reg. No. 29,299; Mark H. Jay, Reg. No. 27,507; Paul Kiel, Reg. No. 40,677; Rosa S. Kim, Reg. No. 39,728; David W. Laub, Reg. No. 38,708; Peter A. Luccarelli, Jr., Reg. No. 29,750; Jeffrey P. Morris, Reg. No. 25,307; Donald B. Paschburg, Reg. No. 33,753; Jeff Slusher, Reg. No. 34,729; Darryl A. Smith, Reg. No. 37,756; Daniel J. Staudt, Reg. No. 34,733; Heather S. Vance, Reg. No. 39,033; Scott T. Weingaertner, Reg. No. 37,756; Robert A. Whitman, Reg. No. 36,966; Ira Lee Zebrak, Reg. No. 31,147

Send correspondence to:


Siemens Corporation
Intellectual Property Department
186 Wood Avenue South
Iselin, NJ 08830

Direct telephone calls to:

Elsa Keller, Legal Administrator (732) 321-3026

I hereby declare that all statements made herein on my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole
or first inventor Rajaroo JAMMY

Inventor's signature 


Date 7/14/99

Residence Wappingers Falls, New York

Citizenship India

Post Office Address 5C Pembroke Circle, Wappingers Falls, NY 12590

Full name of second
inventor Philip L. FLAITS

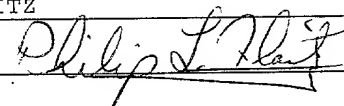Inventor's signature 

Date 7-14-99

Residence Newburgh, New York

Citizenship United States

Post Office Address 1 Longview Dr., Newburgh, NY 12550

Chm G. Wang